

Specyfikacja / Specifications

Model:	VOLOS SHORT 60	VOLOS SHORT 120	VOLOS SHORT 200
Ref.no.	HB25001 / HB25002	HB25003 / HB25004	HB25005 / HB25006
Colour temp.	4000 / 6500K	4000 / 6500K	4000 / 6500K
Power	29W	58W	102W
Input voltage	220-240VAC	220-240VAC	220-240VAC
Output voltage	Driver (included)	Driver (included)	Driver (included)
Lumen output	3660 / 3750Lm	7320 / 7500Lm	12810 / 13120Lm
Lifespan	60000h	60000h	60000h
Colour	Silver	Silver	Silver
Dimensions(L*W*H)	46*34*560mm	46*34*1120mm	46*34*1960mm

Przed instalacją zawsze wyłącz zasilanie główne

Always turn off main power before installation


Před instalací vždy odpojte přístup napájení

Üzembehelyezés el"ott mindig kapcsolja ki az áramot


①




③

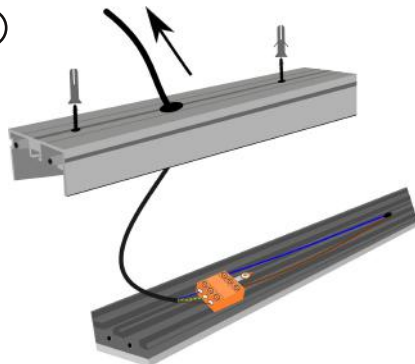

②

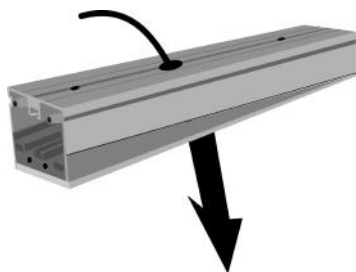

④

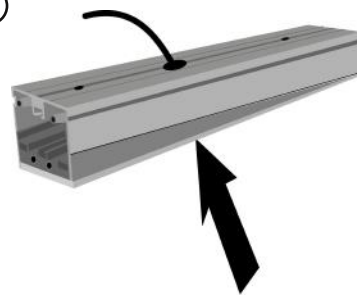

Holdbox

96-321 Żabia Wola
Katowicka 11, Biewiewicz
www.holdbox.eu

IP20  

CE  **RoHS**


 **HOLDBOX**

MADE IN POLAND

⑤



⑥

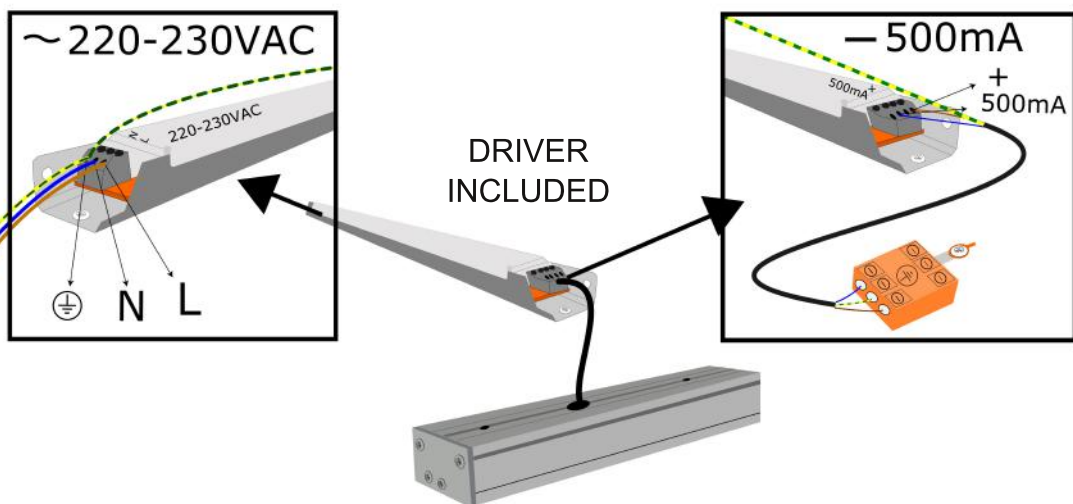

Instalacja oprawy powinna być wykonana przez wykwalifikowanego elektryka

Installation should be carried out by your local electrician

Instalace musí být provedena osobou s certifikací v oboru elektro (pracovník dle vyhl. 50/78 Sb. S. § 6,7 a vyšší)

A lámpatest üzembehelyezését képesített villanyszerelő végezze

Holdbox

96-321 Żabia Wola
Katowicka 11, Bieniewiec
www.holdbox.eu

IP20  

CE  **RoHS**

HOLDBOX

MADE IN POLAND